

FLOW SAFE EQUIPMENT CC

DRY BREAK COUPLINGS - "BAYONET STYLE"

Dry Break Couplings combine speed, safety, cleanliness and durability with compactness of design.

Dry Breaks are doubly safe as the product cannot flow until the coupling has locked into position, and the coupling can only be disconnected when the valve lever has been closed. Since product loss is thereby eliminated, potential hazards when handling difficult products are minimized.

The spring-loaded coupling valve is self-adjusting to the adapter, so any wear between the two parts is automatically compensated. On disengagement the automatic closure prevents product spillage and keeps the working area clean.


Important: Never operate lever or valve without the male piece being inserted correctly.



100mm Coupling BSP Female Inlet




100mm Adapter Flanged Inlet

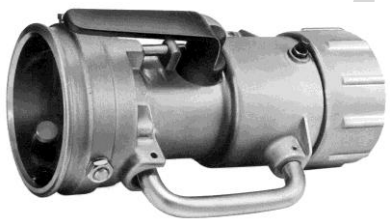

80 (65) mm Coupler BSP Female Inlet



80mm Adapter Flanged Inlet

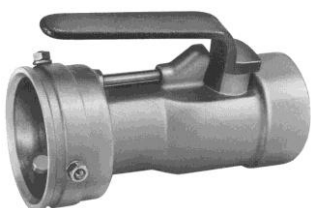

50mm Coupler BSP Female Inlet



80mm or 50mm Adapter, BSP Female Inlet